

## Instructions for changing the Turn Signal mode



**TLFMU** Full LED Taillights suitable for Ford Mustang VI S550 (2015-2019) Red with Dynamic Sequential Turning Lights



**TLFMUS** Full LED Taillights suitable for Ford Mustang VI S550 (2015-2019) Smoke with Dynamic Sequential Turning Lights



**TLFMUC** Full LED Taillights suitable for Ford Mustang VI S550 (2015-2019) Smoke Clear with Dynamic Sequential Turning Lights

# MUSTANG 3A3R TAILLIGHT ASSEMBLY USER MANUAL



## Available Modes

- Mode 1. Cursor indicator
- Mode 2. Triple amber indicator
- Mode 3. Red dynamic mode (steering priority)
- Mode 4. Yellow dynamic mode (steering priority).
- Mode 5. Factory mode

**Tips:** If there is a disorder in the taillight function, it will be automatically reset to the factory mode after restarting.

**After-sales service: please contact the seller**

## Precautions

1. Keep moisture-proof materials and plastic bags away from children.
2. When installing this product, please consult a professional to install it to avoid damage to the vehicle and product caused by improper installation.
3. If there is any smell or strange noise during the operation of the product, please disconnect the power immediately and contact the after-sales service personnel.
4. If the product accidentally falls or the casing is damaged, immediately disconnect the power supply and contact the after-sales service personnel.
5. Please do not disassemble and repair this product. If necessary, please contact the after-sales service personnel.

## READ BEFORE USE

### How to switch the mode of the 3A3R taillights

Make sure the light switch and turn signal are off before switching modes.

1. Turn on the ACC switch (vehicle power) first.
2. Make sure the light switch is in OFF position.
3. Press and hold the brake pedal.
4. Rotate the light switch 4+n times (n = mode number) continuously between ON (2nd dial) and OFF (first dial) within 6 seconds. Switch should be in OFF position when action complete (Mode 1-cursor; Mode 2- triple amber, Mode 3- all red (USD M): Mode 4-sequential. Mode 5-factory)
5. Turn on the hazard light for 2 seconds and turn off the hazard light
6. Release the brake pedal and check if mode switch is completed.
7. If mode change unsuccessful, put light switch to OFF and repeat from step 1

## ACCESSORIES CONTENT

### The following are available accessories



**ACCESSORY 1 : UPPER (3RD) BRAKE LIGHT CABLE FOR USD M**



**ACCESSORY 2 : USD M TO NON-USD M ADAPTER CABLE**

## USDM HARNESS WIRING

The USDM version of the wiring harness diagram

1. First find the plug of the upper brake light , as shown in (Figure 1 ):




2. Use Accessory 1 : upper brake light adapter cable for USDM



## NON-USDM WIRING HARNESS DOCKING

The wiring diagram applies to non-USDM Mustangs


Accessories 2 :USDM to non-USDM adapter cable

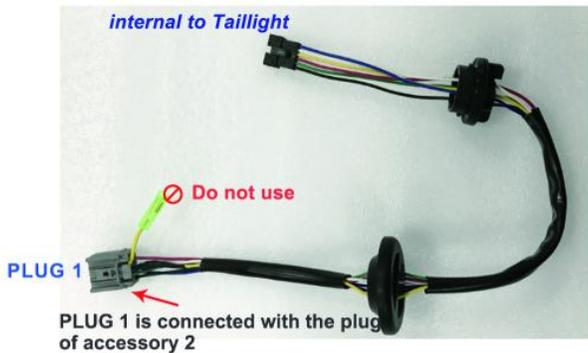

## USDM WIRING CONT.

The USDM version of the wiring harness wiring diagram

3. The picture below is the US version car assembly wiring harness

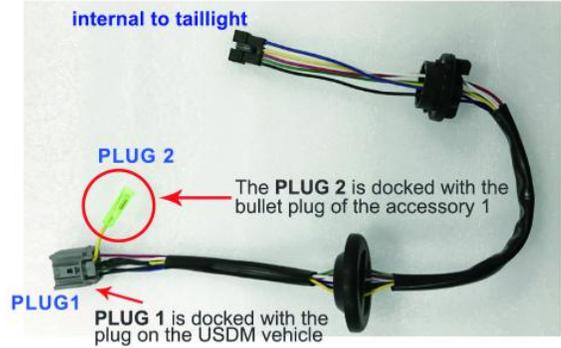

## 1. CURSOR INDICATOR MODE

Turn signal



Running light

Brake light



Running light & Turn signal



## 2. TRIPLE YELLOW MODE

Turn signal



Running light



Brake light



Running light & Turn signal



## 4. SEQUENTIAL AMBER MODE

Turn signal



Running light



Brake light



Running light & Turn signal



## 3. ALL RED (USDM) MODE

Turn signal



Running light



Brake light



Running light & Turn signal



## 5. FACTORY MODE

Turn signal



Running light



Brake light



Running light & Turn signal

